


ferag...


ADDED VALUE



XtraWin
Stitching

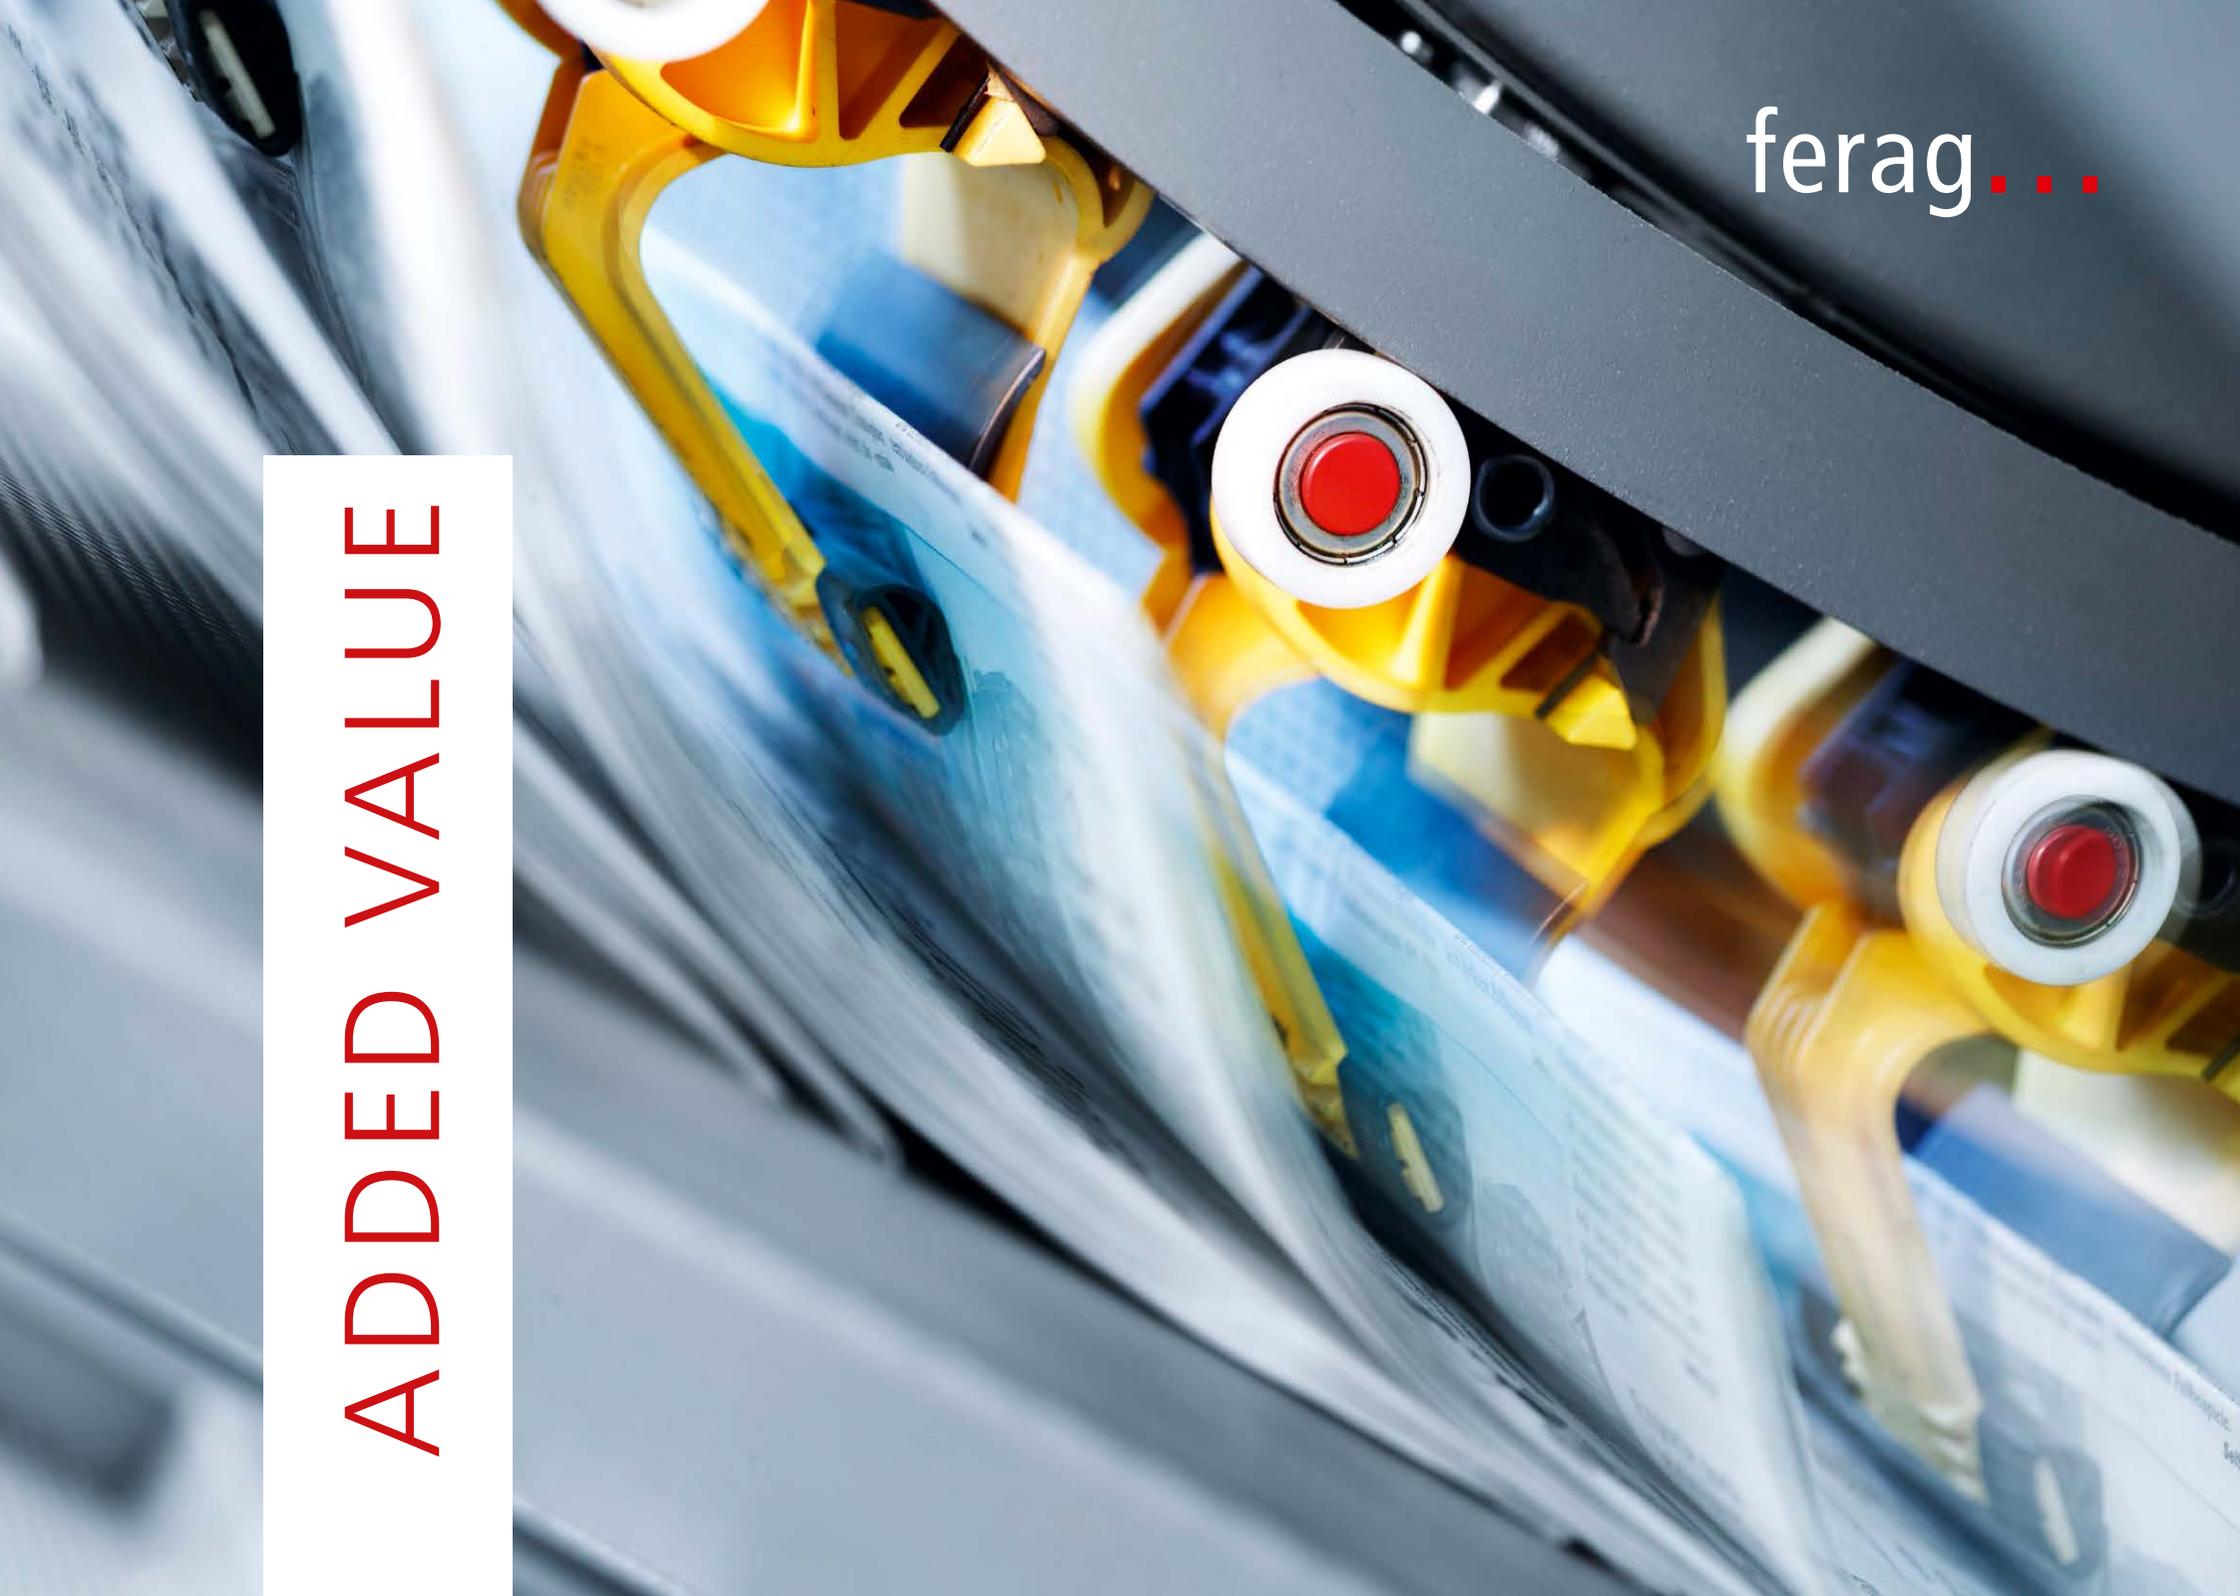

XtraWin
Trimming

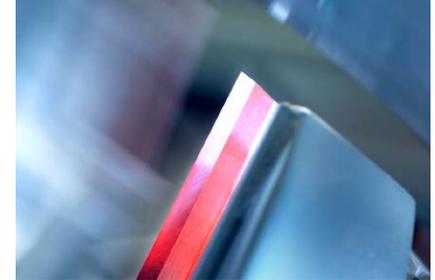

PolyStream
Polybagging



StreamFold
Folding




fold n'stitch
Folding and Stitching



TriLiner
Interactive Advertising



XtraWin

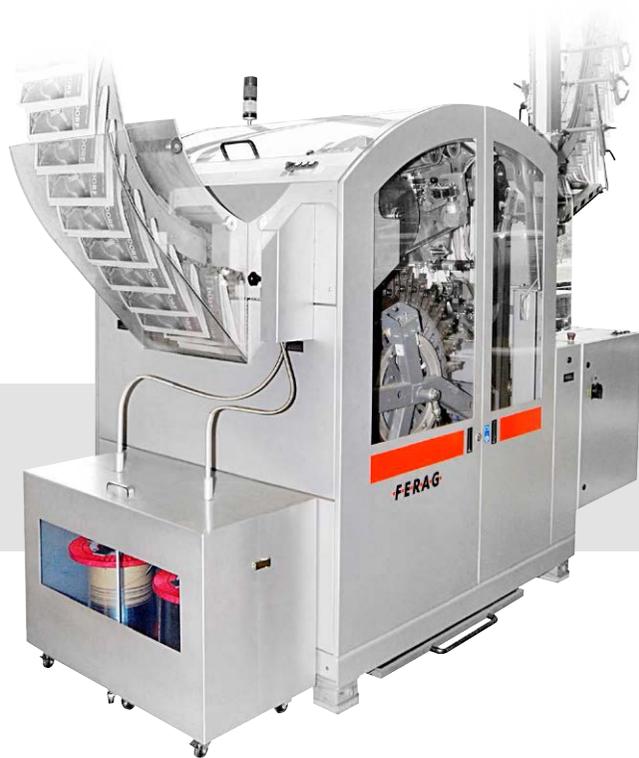


StreamStitch uses the tried-and-tested stitching technology from the UniDrum. Easy integration into new or existing systems opens up new markets. Lucrative products like special supplements or magazine-like publications can be produced in-house.

Specifications

- Max 40,000 cph
- FW 290 to 480 mm
- FL 210 to 310 mm
- 16 to 164 tabloid pages
- Lap opening
- 2 stitches
- Staple width fixed at 15 mm
- Integration into the UTR conveyor

FW: Format Width, FL: Format Length

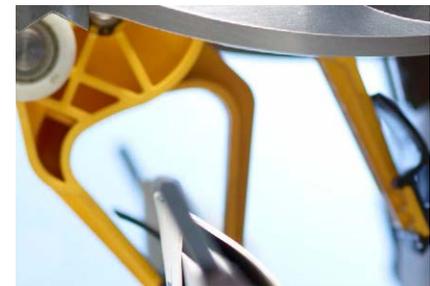



The benefits to you

- Higher value creation
- Easy integration
- Semi-commercial

Stitching

XtraWin



Processing on the single copy and a perfect shear-cut on three sides guarantee maximum product quality. Automatic format presetting and user-friendly operation mean that extremely efficient procedures are achieved while occupying a small space. Thanks to the rotary processing concept, production is stoppage-free and gentle on the product.

Specifications

- Max. 50,000 cph with 1:1
Max. 100,000 Ex./h with 2:1
- FW 300 to 450 mm trimmed
- FL 148 to 190 mm trimmed
- 8 to 320 tabloid pages
- Max. product thickness 12 mm
- UTR and TTR compatible

FW: Format Width, FL: Format Length



A close-up, high-angle photograph of a paper trimmer's blade cutting through a stack of papers. The blade is a thin, metallic strip, and the papers are being fed from the bottom right towards the top left. The trimmer's frame is a light blue color. The background is blurred, showing more of the machine's structure.

The benefits to you

- High trimming quality
- Processing on the single copy
- Long knife service life

Trimming

PolyStream

The unique rotary sealing concept with four individually controllable sealing bars and ODC (Optical Distance Control) gap detection enables an unprecedented net output.

The modular design can be combined with tried-and-tested Ferag conveyors and bundling technology to safeguard the efficiency of your investment.



Specifications

- Max. 30,000 cph
- FW 210 to 450 mm
- FL 150 to 310 mm
- 180 to 370 mm bag length
- 2 to 35 mm product thickness (pressed)
- Online off the UTR and TTR conveyor
- Offline with JetFeeder or Multidisc
- Options
 - Inkjet-addressing
 - Register control (marker)

FW: Format Width, FL: Format Length





The benefits to you

- Product integrity
- Protection from external influences
- Boost in content value

Polybagging

StreamFold

Permanent guidance of the product through the entire folding process brings high fold quality. Flexible infeeds from several conveyors make for high efficiency.


StreamFold allows varied, demanding and efficient application for improved utilization of press capacity.



Specifications

- Max. 60,000 cph
- FW 297 to 450 mm
- FL 210 to 310 mm
- 8 to 128 tabloid pages
- Online off the UTR and TTR conveyor
- Offline with JetFeeder or Multidisc

FW: Format Width, FL: Format Length

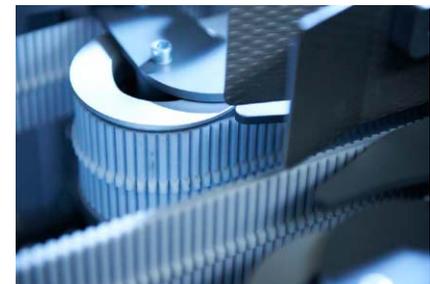



The benefits to you

- High fold quality
- Mobile deployment
- Easy integration

Folding

fold n'stitch

Folding and stitching in the production flow. Flexible deployment not dependent on a fixed-position folder delivery to enable efficient application within the mailroom.

In combination with a three-side trim, Fold n' Stitch can be upgraded for magazine production.



Specifications

- Max. 40,000 cph
- FW 297 to 450 mm
- FL 210 to 310 mm
- 4 to 64 tabloid pages
- Online off the UTR and TTR conveyor
- Offline with JetFeeder or Multidisc

FW: Format Width, FL: Format Length



The benefits to you

- Quality folding and stitching process
- Flexible deployment
- Inexpensive solution

Folding and Stitching



TriLiner



Used for MemoStick®, gimmicks or cards as a unique and exclusive advertising format for your print products, whether its through prominent placement or an eye-catching design on newspapers, magazines or advertising freesheets.

Specifications

- Max. 45,000 cph
- Card min. 68 x 76 mm
max. 148 x 105 mm
- Carrier product
2-fold/tabloid
Max. product thickness 20 mm
- Positioning on the front or
back page





The benefits to you

- Interactive advertising format
- Eye-catching, prominent, exclusive
- High visibility

Interactive Advertising

ferag... ■ ■ ■

Ferag AG
Zurichstrasse 74
CH-8340 Hinwil
Phone +41 44 938 60 00
Fax +41 44 938 60 60
info@ferag.com
www.ferag.com

