
Ferag Intelligent Vehicles

Free humans from manual handling



The state-of-the-art AGV and AMR vehicles with a complete range of products for intelligent intralogistics solutions are based on proven Quicktron technology. These mobile robots include automated solutions for the handling of shelves, mobile devices, pallets and basket of work without an operator. In suitable projects, this new product range will be combined with Ferag products (Denisort, Deniway, Easychain and Skyfall) into fully integrated solutions.

Rack Handling Solutions FIV M10A FIV M15A FIV M50A FIV M100B FIV M150A FIV M150A FIV M150A FIV M150A

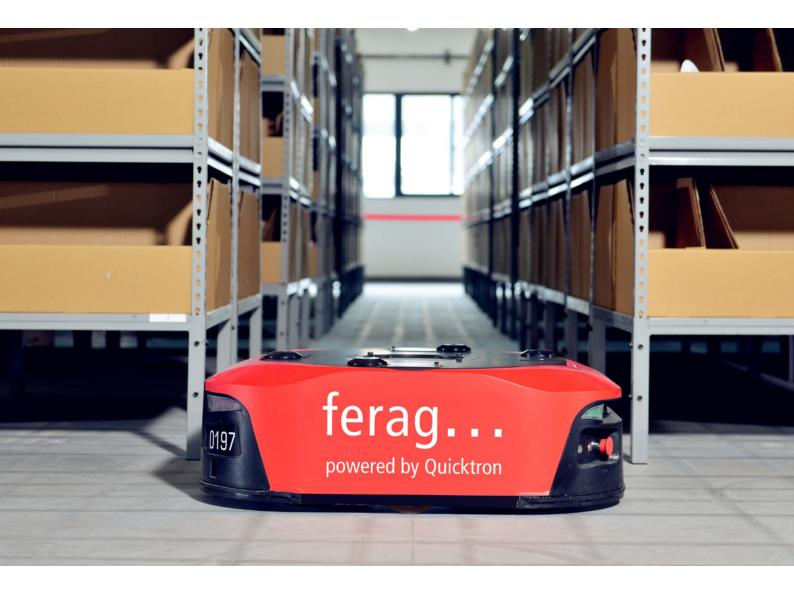





Applications

Goods-to-person order picking for e-commerce, retail, B2B and 3PL Sorting and sequencing for dispatch, incoming goods and returns In-house material delivery

Flexible production

Clean-room production

Benefits

Safer environment for the operators compared with forklift and tugged trains

Increased productivity and efficiency thanks to automation leads to rapid ROI


Flexible solution for different seasons (for example Black Friday and regular season)

Fully automatic loading and unloading possibilities

Best use of warehouse space thanks to the high precision of the robots (improves storage rate by 60%)

Excellent path planning ability, various combination of equipment

Modular and extensible design

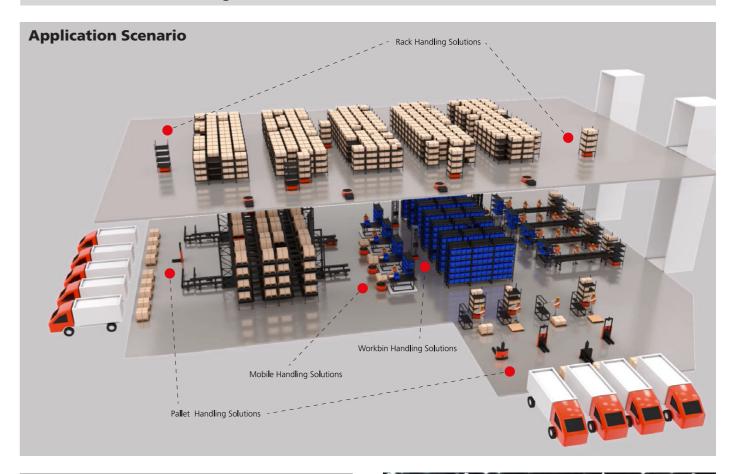

References

E-commerce / Retail

Postal Services

3PL

Pharmaceutical and chemical industry

Automotive industry

Manufacturing industry







Parameter

Rack Handling Solutions


















			0:		***	000		1 mg	
Product Name		FIV M10A	FIV M15A	FIV M50A	FIV M60B	FIV M60C	FIV M100A	FIV M100B	FIV M150A
Product Model		M10A-SBDQR256N-51	M15A-LBDQR0N-31	M50A-SBDQR23456N-61	M60B-SBDQR0G-12	M60C-HTDQR0N-13	M100A-SBDQR0N-21	M100B-HTDQR0N-22	M150A-HBDQR0N-41
Applicable Scenarios		PCB	Storage / Handling	Manufacturing / Transportation	Manufacturing/Transportation	E-commerce / Manufacturing	Storage /Handling	E-commerce / Manufacturing	Storage / Handling
Basic Parameters	size	600 * 500 * 580mm	620 * 538 * 221mm	914 * 664 * 300mm	915 * 716 * 313mm	956 * 730 * 240mm	1110 * 889 * 323mm	1184 * 834 * 250mm	1530 * 1230 * 320mm
	Rotation diameter	716mm	620mm	1038mm	980mm	956mm	1165mm	1250mm	1820mm
	Self-respect	100kg	78kg	200kg	215kg	145kg	290kg	210kg	550kg
	specified load	100kg	150kg	500kg	600kg	600kg	1000kg	1000kg	1500kg
	Top elevation	55mm	55mm	55mm	55mm	55mm	55mm	60mm	110mm
Moving Speed	No-load rated speed	0.8m/s	2.2m/s	1.5m / s	1.5m/s	2m/s	1.2m/s	1.5m / s	1.5m/s
	Full load rated speed	0.6m/s	2.2m/s	1.2m/s	1.5m/s	1.5m/s	1.2m/s	1.2m / s	1.0m/s
	Navigation method	QR code	QR code	QR code	QR code	SLAM / Texture / QR Code	QR code	SLAM / Texture / QR Code	QR code
Navigation	Positioning accuracy	± 10mm	± 10mm	± 10mm	± 10mm	± 10mm	± 10mm	± 10mm	± 10mm
And Positioning	Stop accuracy	± 5mm	± 5mm	± 5mm	± 5mm	± 5mm	± 5mm	± 5mm	± 5mm
	Stop angle accuracy	± 1°	± 1°	± 1°	± 1°	± 1°	± 1°	± 1°	± 1°
Battery Parameters	Type of battery	LiFePO4	NCA	LiFePO4	NCA	NCA	NCA	LiFePO4	NCA
	Battery capacity	48V / 17.5ah	48V / 18ah	48V / 24.5ah	48V / 26ah	48V / 36ah	48V / 40ah	48V / 38.5ah	48V / 60ah
	Rated battery life	8h	8h	8h	8h	9h	8h	8h	8h
	Charging time	≤1.5h	≤1.5h	≤1.5h	≤2h	≤1.2h	≤2h	≤1.5h	≤2h
	Cycle life	1500 full times	500 full times	1500 times full	500 full times	500 full times	500 full times	1500 full times	500 full times
	Emergency stop	•	•	•	•	•	•	•	•
	Audible alarm	•	•	•	•	•	•	•	•
	Lidar	•	0	•	•	•	•	•	•
Safety	Safety touch	•	1	•	1	0	1	0	0
	Laser / ultrasonic	•	1	•	1	0	/	0	0
	3D obstacle avoidance	1	1	•	1	0	1	0	/
	The width light	•	1	•	1	0	1	0	0
Through Performance	Crossing ability	≤4mm	≤4mm	≤20mm	≤5mm	≤30mm	≤5mm	≤30mm	≤30mm
	Ability	≤2mm	≤2mm	≤5mm	≤5mm	≤5mm	≤5mm	≤5mm	≤5mm
	Ability to cross the slope	≤0.5% (0.3°)	≤0.5% (0.3°)	≤8.5% (5°)	≤3% (1.8 °)	≤5% (2.8°)	≤3% (1.8°)	≤5% (2.8°)	≤3% (1.8°)
Environmental Parameters	Operating temperature	-10 ~ 45 ℃	-10 ~ 45 °C	-10 ~ 45 ℃	-10 ~ 45 °C	-10 ~ 45 ℃	- 10 ~ 45 ℃	-10 ~ 45 °C	- 10 ~ 45 ℃
	Noise	<75dB	<75dB	<75dB	<75dB	<75dB	<75dB	<75dB	<75dB

Parameter

Mobile Handling Solutions

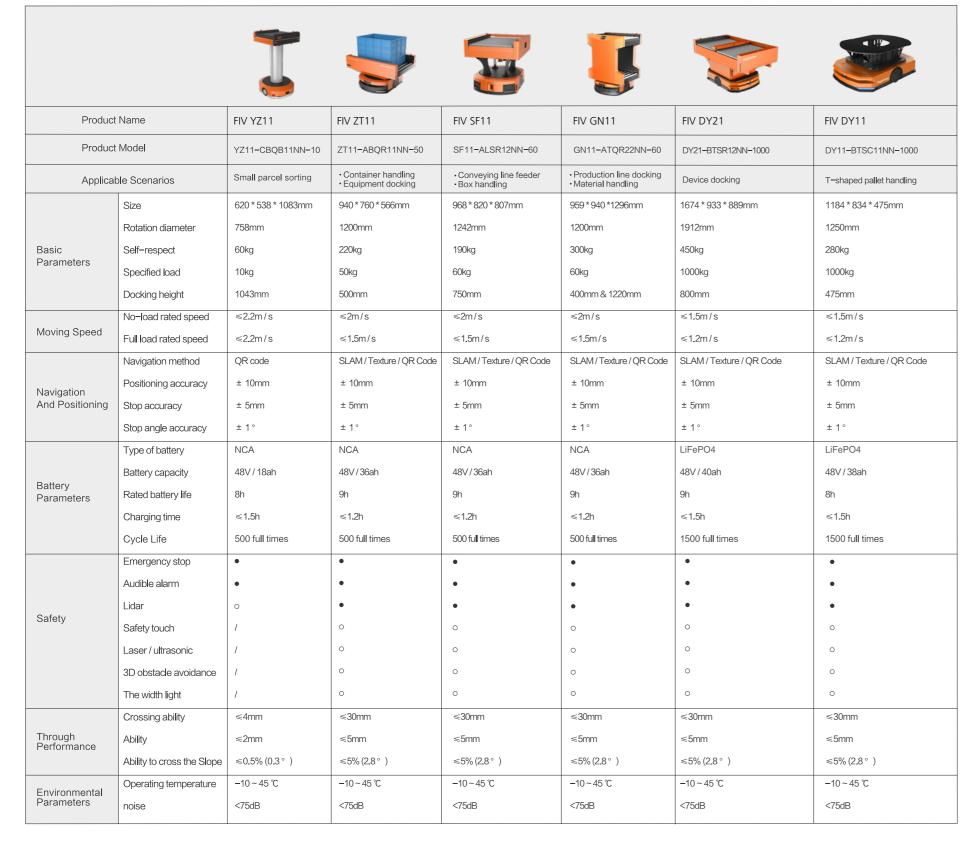

Workbin Handling Solutions

			745 35	
Р	roduct Name	FIV C36A	FIV C41A	
Р	roduct Model	C36A-SBDQC37NN-31	C41A-SBDQS27NN-11	
А	pplicable Scenarios	Material container (600*400mm)	Material box (600*400mm) fork picking	
	Size	1500 *810 *4030mm	906 *722 *3200mm	
	Rotation diameter	1655mm	1020 mm	
	Self-respect	480kg	320kg	
	Fork arm rated load	30kg	40kg	
Basic	Adapt to the largest bin size	600*400mm (I*W)	600 * 400mm (I *W)	
Parameters	Min aisle width	1100mm	860mm	
	Single pick and place time	9s	8s	
	Minimum pick-up bin height	240mm	400mm	
	Height of pick-and-place box	3700mm	2700mm	
	Carrying shelves	6	_	
Moving Speed	No-load speed	<2m/s	<1.2m/s	
woving Speed	Full load speed	<1.0m/s	<1.0m/s	
	Positioning accuracy	± 10mm	± 10mm	
Navigation	Stop accuracy	±5mm	±5mm	
And Positioning	Stop angle accuracy	±1°	±1°	
	Navigation method	QR code	QR code	
	Type of battery	NCA	NCA	
Battery	Battery capacity	48V / 50ah	48V / 26ah	
Parameters	Rated battery life	10h	8h	
	Charging time	1.5h	1.5h	
	Cycle life	500 full times	500 full times	
	Crossing ability	<5mm	<5mm	
Through Performance	Ability	<3mm	<2mm	
	Ability to cross the slope	<3%	<1.5%	
Environmental	Operating temperature	0-45° C	0-45 ° C	
Parameters	Noise	<70dB	<70dB	
			I	

Parameter

Pallet Handling Solutions

Product Name		FIV F100B		Positioning accuracy	± 10mm
Product Model		F100B-TLAQ1107B10NN-32	Navigation accuracy	Stop accuracy	± 10mm
	Dimension	1518 × 900 × 1939mm	accuracy	Stop angle accuracy	± 1 °
	Aisle requirements	1705 (with tray)mm		Type of battery	LiFePO4
	Rotation diameter >1.8m Weight without load 350kg Rated capacity 1000kg		Battery parameters	Battery capacity	48V/60Ah
Basic				Rated battery life	8h
parameters				Charging time	Fast charge 1.5h
	Lifting height	1000mm		Life cycle	1500 full times
	Adapted tray size 1150mm × 770mm		Through	Crossing ability	<15mm
	Adapted tray type	font tray	performance	Ability	<10mm
	Pick and place time	20s		Ability to cross the slope	<2.5%
Moving	No-load speed <1.5m/s Full load speed <1.0m/s		Environmental parameters	Ambiant temperature	0-45 °C
speed				Noise	<65dB

Family-owned company

For over 60 years, Ferag AG of Hinwil (Switzerland) has been the leading provider of intralogistic solutions in the print media industry: Ferag systems are at work every day, processing newspapers and magazines with print runs in the millions. Its recognised competence as an innovative supplier of integrated conveyor systems has opened doors to all industries, with material flow systems having unlimited applications in processing industries as well as in fashion and clothing, automotive, food and beverage logistics and e-commerce.







Ferag AG









